


INTERNAL WINDOWS AND DOORS



A non-insulated aluminium profile system designed for the manufacturing of internal constructions: glazed partitions, windows and doors.

- central hardware groove in door profiles
- window sashes with PVC hardware groove available
- wide range of available hardware
- wide range of possible constructions: coplanar doors, doors with a central hardware groove, glass doors, smoke control doors, manual and automatic sliding doors, swing doors, windows and glazed partitions
- window sashes flush with the frame on the outside
- wide choice of possible door leaves - with or without kickplate, with or without threshold
- screwed and crimped joints available

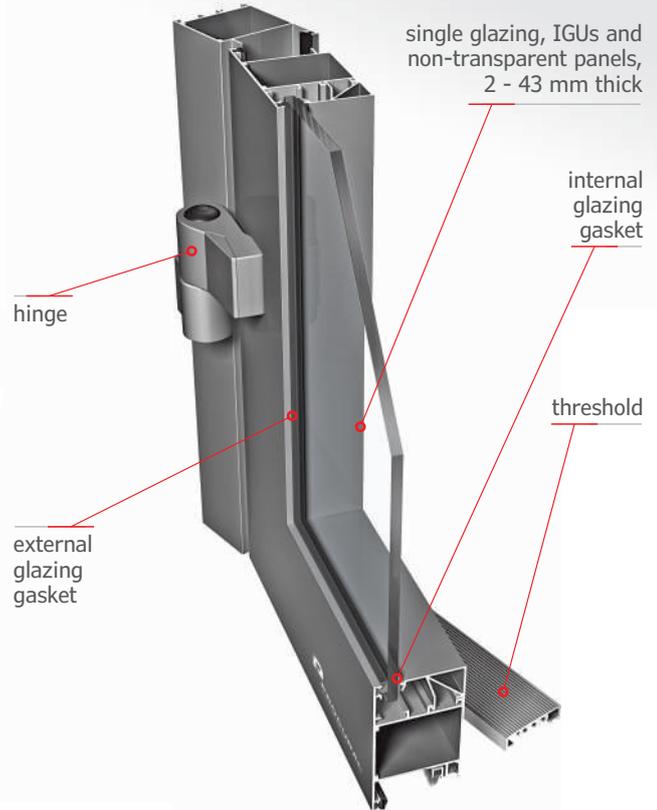

TECHNICAL PARAMETERS

Filling thickness	doors and partitions: 2 - 35 mm windows: 5 - 43 mm
Profile depth	52 mm
Type of filling	single glazing, IGUs and non-transparent panels
Air permeability	class 2
Smoke control	class S _a and S ₂₀₀ in acc. with EN 13501-2:2016

Certification

National Technical Assessment ITB-KOT-2018/0621

