


$$U_{cw} = 0.62 \text{ W}/(\text{m}^2\text{K})$$

*reference construction dimensions: L 1200 x H 2500 mm
 $U_g = 0.5 \text{ W}/\text{m}^2\text{K}$, triple glazing

A high thermal performance mullion-transom system designed for the construction of curtain walls, roofs, rooflights with improved thermal characteristics

- high thermal insulation, sound reduction, watertightness and resistance to wind load performance values
- the PF152HI PASSIVE variant is certified by the Passivhaus Institut in Darmstadt (pH class) solutions for steel and wooden subconstructions
- fire-resistant spandrel solutions available (EI60 class)
- external cover profile width - 51 mm
- wide range of possible geometrical designs and colours
- several types of external decorative elements available
- "horizontal" or "vertical" line constructions
- profile bending possible
- PROCURAL system windows may be used as filling
- maximum filling weight 1050 kg
- interconnected with other PROCURAL systems

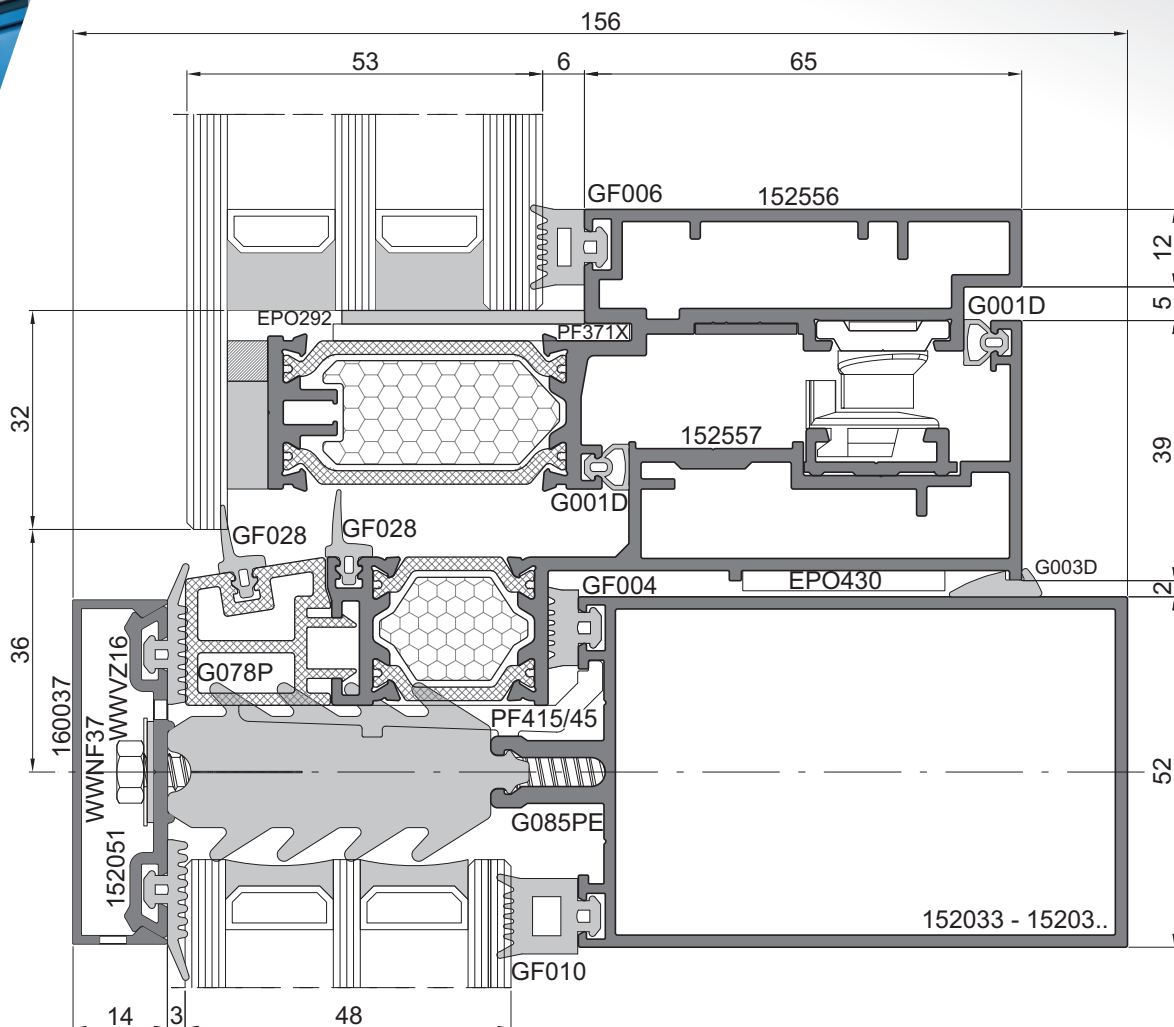

TECHNICAL PARAMETERS

| | |
|----------------------------------|------------------------------------------------------------------------------------|
| Filling thickness | 6 - 66 mm for curtain walls, 24 - 60 mm for windows |
| Mullion and transom width | 52 mm |
| Thermal insulation | U_f from 1.0 W/(m ² K) U_{cw}/U_w from 0.62 W/(m ² K) |
| Air permeability | class AE 2400 |
| Watertightness | class RE 2700 |
| Sound reduction | $R_w = 41$ dB |
| Resistance to impact | class E5/I5 |
| Resistance to wind load | class 2400 Pa, E 3600 Pa |
| Resistance to burglary | class RC2, RC3 in acc. with PN-EN 1627 |
| Filling fixing method | using pressure plates and cover profiles |

Certification

type testing in acc. with EN 13830, certified by the Passivhaus Institut in Darmstadt